Engineered Filtration AC105 ACTIVATED CARBON

Systems



Features

AC105 contains 105 grams of activated carbon per ft2

Available in rolls or pre-cut to specified size and shape

Low air resistance, non bypass, disposable media offered for light, medium or heavy-duty applications

Description

AC105 Activated Carbon Media is effective at removing and preventing odors and fumes from building up in recirculated air.

The Media also prevents outside fumes generated from helicopters and trucks, roofing tar, wildfire smoke fumes, cigarette smoke and other undesirable odors.


Benefits

AC105 Activated Carbon Media "adsorbs" odors and pollutants without settling of carbon.

Removes odors, gaseous pollutants and particles.

Quick solution for emergency IAQ problems (wildfire smoke fumes, construction projects, etc.)

Good for non-standard air handling systems.

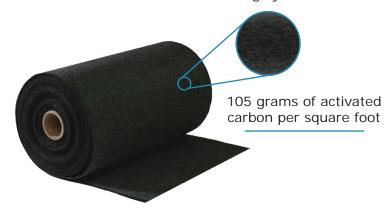

Applications

- Hospitals, food manufacturing facilities, commercial kitchens, commercial and/or industrial installations
- · Air intakes on rooftops, near loading docks, heliports, and/or at ground level
- Air cleaners; electronic and/or mechanical
- Removes odors from cooking, hospitals, asphalt, food, animals, and hydrocarbon. Including Ozone.
- Commercial appliances; ductless range hood, bath fans and over-the-range (OTR) microwave ovens
- · Available in rolls or pre-cut to specified size and shape

	GAC - Weight in	GAC – Weight in			
Product	Grams per ft ²	Grams per m ²	Thickness	Dimensions	Resistance (300 FPM)
AC105	105	1130	0.40"	4' x 66'	0.54" w.a.



